




REV: 04292010

ITE / EMBEDDED POWER SUPPLY

PRODUCT FEATURES:

- Universal AC Input
- Single, Dual, and Trip Output Available
- Convection Cooled Operation
- Compact, Open-Frame, Low Profile: 3" x 5" x 1.1"
- Audio/Video Approvals (Triple Output models)
- MTBF > 100k Hours (25°C, Full Load)
- Meets Class B Emissions Standards
- International Safety Approvals

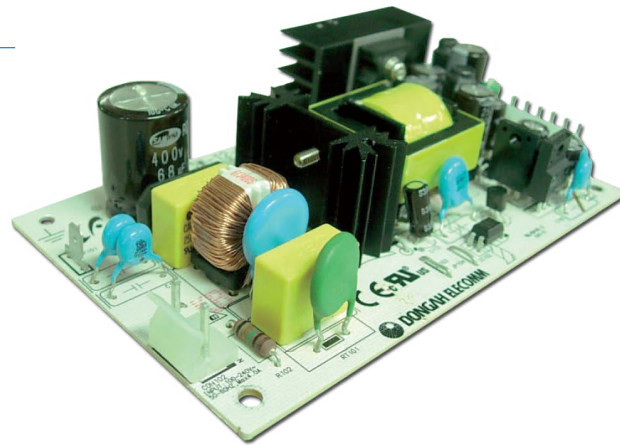

INPUT SPECIFICATIONS:

VOLTAGE	Universal AC Input (90 ~ 264 VAC)
FREQUENCY	47-63Hz
INRUSH	15A (115VAC) / 30A (230VAC), max Cold Start
CURRENT	1.0A (115VAC) / 500mA (230VAC) continuous
PROTECTION	Single 4A Fuse, 250VAC except NF-see Note 1
LEAKAGE	≤750uA @ 264 VAC
HOLD-UP	16ms @ 230VAC (Full Load)
EFFICIENCY	73% (typical, 230VAC)
HARMONICS	EN61000-3-2 Class D Compliant (>98 PF)

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE	-10°C to +70°C (Derate 2.5% per °C above 50°C)
STORAGE TEMPERATURE	-20°C to +85°C
COOLING	Convection Cooled
HUMIDITY	5% ~ 95% (non-condensing)
VIBRATION	10-55Hz, 2G, 3Min Period, / 60 min each (3 axes)
SHOCK	20G Peak Acceleration
RELIABILITY	>100,000 Hours (per Mil. STD 217F)
SIZE (INCHES)	9.9" x 5.0" x 2.44"

OUTPUT SPECIFICATIONS:

ADJUSTMENT RANGE	Fixed at Factory (see Output Table)
MINIMUM LOAD	5% (each output)
LINE REGULATION	V1 ≤ 3%; V2 & V3 ≤ 10%
LOAD REGULATION	V1 ≤ 3%; V2 & V3 ≤ 10%
RIPPLE	≤2% Vout p-p (20MHz)
SETPPOINT ACCURACY	±1%
EXCURSION	±5% Max for 25% Step Load
RECOVERY	2ms max
OVER-CURRENT	125-150% (Auto-Recovery)
OV PROTECTION	105~115% (recycle input to reset)

EMISSIONS:

EMISSIONS	EN55022 Level B (Conducted)
ELECTROSTATIC DISCHARGE	EN61000-4-2, 4KV Contact/ 8KV Air
RADIATED SUSCEPTIBILITY	EN61000-4-3, 26MHz-2000MHZ, 10V/m, 80%AM
EFT/BURSTS	EN61000-4-4, 2KV
SURGES	EN61000-4-5, 2KV Earth, 1KV Line-Line
CONDUCTED IMMUNITY	EN61000-4-6, 150KHz-80MHz, 10Vrms, 80%AM
VOLTAGE DIPS	EN61000-4-10, 95% Dip, 10ms / 30% Dip, 500ms
VOLTAGE INTERRUPTIONS	EN61000-4-11, 95% reduction, 5ms
FLUCTUATIONS & FLICKER	EN61000-3-3

SAFETY STANDARDS:

UL / cUL	60950 (Singles/Duals); 60065-06 (Triples)
CAN/CSA	E60065-00 Amendment 1 (Triples)
CE MARK	Low Voltage Directive
CB REPORT	IEC 60065/a1:2005 (Triples)




Output Models:	V1 Output			V2 Output			V3 Output		
	VDC	Io (Min)	Io (Max)	VDC	Io (Min)	Io (Max)	VDC	Io (Min)	Io (Max)
PSU-45-5	5V	0.0A	9.0A						
PSU-45-12	12V	0.0A	3.75A						
PSU-45-15	12V	0.0A	3.0A						
PSU-45-24	624V	0.0A	1.88A						
PSU-45A	5V	0.0A	3.20A	+12V	0.1A	2.00A			
PSU-45B	5V	0.0A	3.20A	+15V	0.1A	1.93A			
PSU-45C	5V	0.0A	3.20A	+24V	0.1A	1.20A			
PSU43W-12	5V	0.0A	6.0A	+12V	0.05A	0.6A	-12A	0.05A	0.6A
PSU43W-15	5V	0.0A	6.0A	+15V	0.05A	0.5A	-15A	0.05A	0.5A
PSU43W-12-NF*	5V	0.0A	6.0A	+12V	0.05A	0.6A	-12A	0.05A	0.6A
PSU43W-15-NF*	5V	0.0A	6.0A	+15V	0.05A	0.5A	-15A	0.05A	0.5A

NOTE:

* Note 1: The "-NF" suffix (no fuse) version requires an external input fuse (4.0A / 250VAC) to provide AC Mains protection and meet Safety Requirements.

OUTLINE DRAWING:

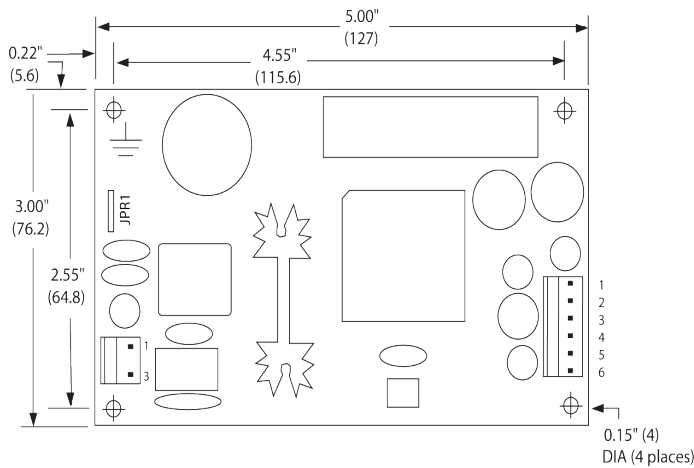

Mating Connectors:

AC INPUT:
Molex 09-50-8031 (Housing)
Molex 08-52-0113 (Pins)

DC OUTPUT:
Molex 09-50-8061 (Housing)
Molex 08-52-0113 (Pins)

Pin Assignments:

AC INPUT:			
Pin	Standard	NF Models	
1	Line	Neutral	
3	Neutral	Line	

DC OUTPUT			
Pin	Single	Dual	Triple
1	+V1	+V2	+V2
2	+V1	+V1	+V1
3	+V1	+V1	+V1
4	COM	COM	COM
5	COM	COM	COM
6	COM	N/C	V3

